1 YEAR WARRANTY

This Power Adapter is a perfect solution for small applications. High quality well-regulated adapter capable for powering up to 20 watt of MaxBrite Ribbon Strip and Cove Light, under cabinet lighting, etc.

Two Prong, Wall Mount Plug

Short circuit, overload, over voltage & over temperature protections

UL Recognized U.S. and Canada

For indoor use only

Fully Isolated Plastic Case

Applications

- Cove Lightings
- Kitchen Cabinet Lighting
- LED indoor lightings
- Decorate lightings

24W Single Output Indoor Rated Constant Voltage LED Power Adapter

★ Specification

Input Voltage	100-240V AC full range (.5A/100V 0.25A/240V)
Frequency	50Hz to 60Hz
Output Voltage	12V DC
Output Power	24W max
Output Current	2A (full load)
Efficiency	80%
Withstand Voltage	1000V AC 5 mA
Leakage Current	0.25mA/240v AC
Ripple and Noise	120mVp-p
Inrush Current	25°c Cold Start 30A/115v AC, 60A/230v AC

★ Environmental

Operating Temperatur	re -10°c to +40°c
Storage Temperature	-25°c to +85°c
Humidity	30%-90% (RH-NonCondensing)
Cooling	Air Convection
Vibration Frequency	10 to 500 Hz
MTBF	732Khrs min MIL-HDBK-217F(25°C)
Dimensions	3-3/8" x 1-7/8" x 1-3/16" (L x W x H)
Weight	4.00 oz.
Input Connection	Two Prong Wall Plug
Output Connection	Male Barrel 5.5X2.1 300v, 105°c 22AWG










★ Mechanical

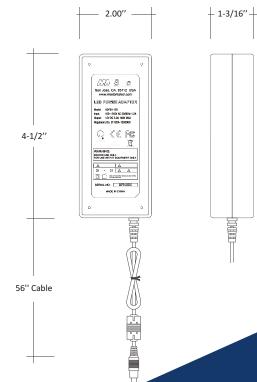



LED POWER ADAPTER